


LITELINK™

Our LiteLink™ slat is one of the most economical chain-link enhancement products available in the market today. Manufactured using the same durable outdoor plastic as our standard tubular fence slats, this single wall "M" shaped slat will give you the visual screening and color enhancement you desire at a very affordable price. LiteLink also uses our patented Bottom-Locking system for fast and easy installation.

- ❖ **DESIGN:** Compact and lightweight, LiteLink's unique shape enables the slat to self stack. A package the size of 2" x 4" contains enough material to cover approximately (10) ten linear feet, making it easy to ship and efficient to store.
- ❖ **STANDARD STOCK HEIGHTS:** 4, 5 and 6 feet.
- ❖ **SPECIAL ORDER HEIGHTS:** 7, 8, 10 and 12 feet.
- ❖ **WIND LOAD AND PRIVACY FACTOR:** Approximately 75%.
- ❖ **SLAT LENGTH:** 3 1/2" shorter than overall height of fence.

Ask for details about the 7-year warranty.

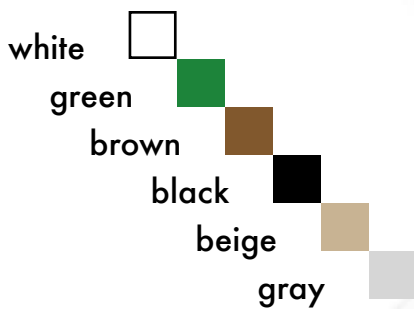

SPECIAL ORDER COLORS



* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.



PHOENIX FENCE

EDMONTON

12816-156 STREET T5V 1E9
PHONE: (780) 447-1919
FAX: (780) 447-2512
TOLL FREE: 1-800-661-9847
E-MAIL: phoenix@phoenixfence.ca

CALGARY

6204-2nd STREET S.E. T2H 1J4
PHONE: (403) 259-5155
FAX: (403) 259-2262
TOLL FREE: 1-888-220-2525
E-MAIL: calgary@phoenixfence.ca

WEBSITE: www.phoenixfence.ca

Covered by one or more of the following patents:
US Patent 4,725,044 / 5,165,664 / 5,234,199 / 4,995,591

Manufactured by



FENCE PRODUCTS SPECIFICATIONS

LITELINK SIZE SPECS

SLAT TYPE	SLAT WIDTH	MESH SIZE	WIRE GAUGE	SLATS PER BOX	APPROX. COVERAGE PER BOX
LITELINK	1 1/4"	2" & 2 1/4"	9, 11 OR 11 1/2	82	TO LINEAR FEET

MATERIALS

The Litelink product is extruded from High Density Polyethylene (HDPE), color pigments and ultra violet (UV) inhibitors, specifically designed to retard the harmful effects of the sun and lengthen the life of the product.

DURABILITY

PDS® HDPE Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WINDLOAD DISCLAIMER

Filtrona will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

LIMITED WARRANTY


Litelink carries a 7-year, pro-rata warranty against breakage under normal conditions. Write Filtrona Extrusion for full warranty information.

HDPE TECHNICAL PROPERTIES

Property	Value
Melt Index	(.6) A low melt index indicates improved stress and crack resistance.
Density	(.957) Polyethylene ranges anywhere from .914 to .960 in density. A higher density yields maximum stiffness without becoming overly brittle.
Minimum Temp.	(-76° F) Polyethylene stays flexible even at this temperature extreme.
Maximum Temp.	(250° F) Polyethylene does not distort until reaching this temperature.
Tensile Strength	(3,700 psi) Material will not suffer distortion at lesser loads or impacts.


INSTALLATION INSTRUCTIONS

Step 1

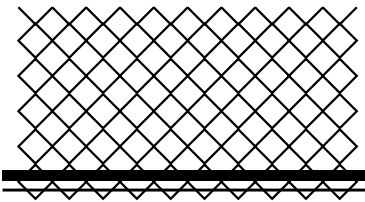

Insert rail horizontally in first full diamond at bottom of fence with open side facing up.

Step 2




Insert vertical slats with beveled/notched end downward. Slat engages and interlocks with bottom rail.

Step 3



Push the vertical slat into the horizontal channel to Lock-In Place.

Complete

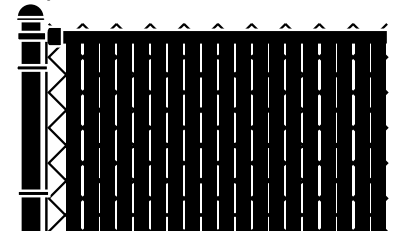

Enjoy a beautiful fence that was simple to install.

Contact your local fence professional for more information about our complete line of enhancement products.

